
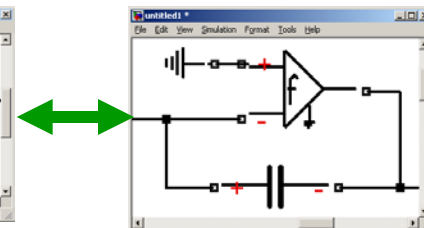
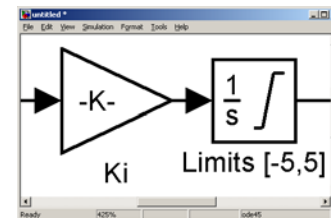
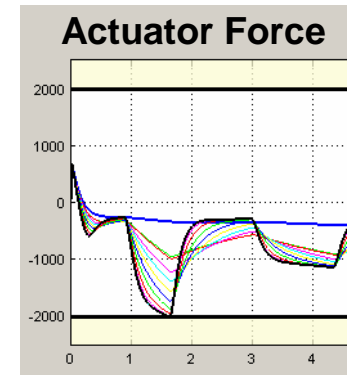
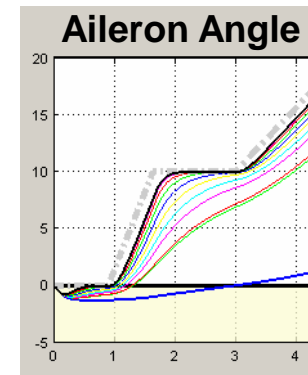


Using Physical Modeling Tools to Design Power Optimized Aircraft

Key Points

1. Testing different actuator designs in one environment saves time and encourages innovation
2. Optimizing systems with respect to design requirements leads to optimal design choices
3. Simulating at different levels of fidelity is required to see effects of design implementation

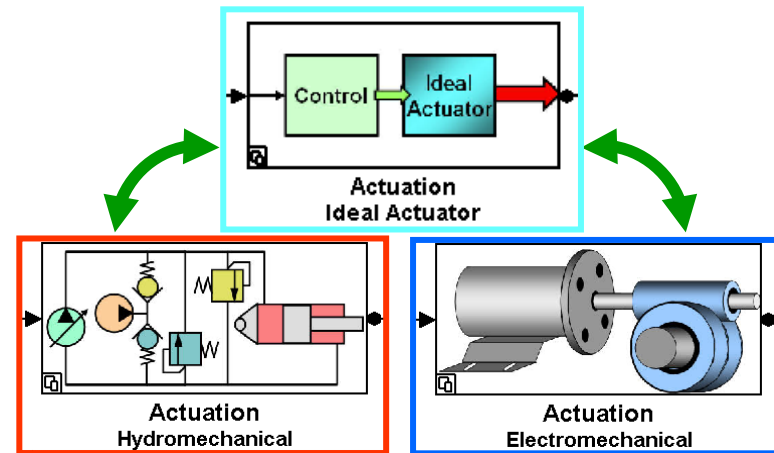

Agenda

- Trends in the aerospace industry 10 min
 - Industry trends
 - Strategies for improvement
 - How simulation can help
- Example: Flight Actuation System 15 min
 - Model explanation
 - Tradeoff study
 - System optimization
 - Assess implementation effects
- Conclusions

Industry Trends

- System needs
 - Aircraft must produce less pollution
 - Aircraft must be more efficient

- Example goals
 - Clean Sky (for year 2020)
 - 50% reduction of CO₂ emissions
 - 80% reduction of nitrous oxide emissions
 - Power Optimized Aircraft (POA)
 - 25% cut in peak non-propulsive power
 - 5% reduction in fuel consumption

- Strategies include aircraft-level optimization, technology

“With 5-6°C warming ... existing models ... estimate an average 5-10% loss in global GDP.”

**Head of the Government Economic Service
UK, 2006**



Research project, EU and industry

Strategies for Improved Aircraft Design

- Technology: Electrical actuation
 - Fewer losses than hydraulic actuation
 - Only needs to be turned on when in use
 - Tend to be more reliable, cleaner, and safer

- Aircraft-level optimization
 - Consolidation of power electronics
 - Localize hydraulic actuation

- Simulation can help with each of these strategies

Boeing 787
Electrical Systems
Brakes
Ice protection
Engine start
Environmental controls
Electrohydraulic pumps

Airbus 380
Electrical Systems
Primary flight control actuators
Thrust reverser actuation
Horizontal stabilizer backup

How Simulation Can Help


1. Tradeoff studies to test electrical and hydraulic systems
 - Determine actuator requirements
 - Test hydraulic and electrical actuator designs

2. System-level models
 - Must be done at aircraft level to optimize architecture
 - Few key parameters and quick simulation

3. Simulating at different levels of fidelity
 - Need to easily add fidelity to see impacts of implementation
 - Reuse work done at system level (Model-Based Design)

Example: Aileron Actuation System

- System


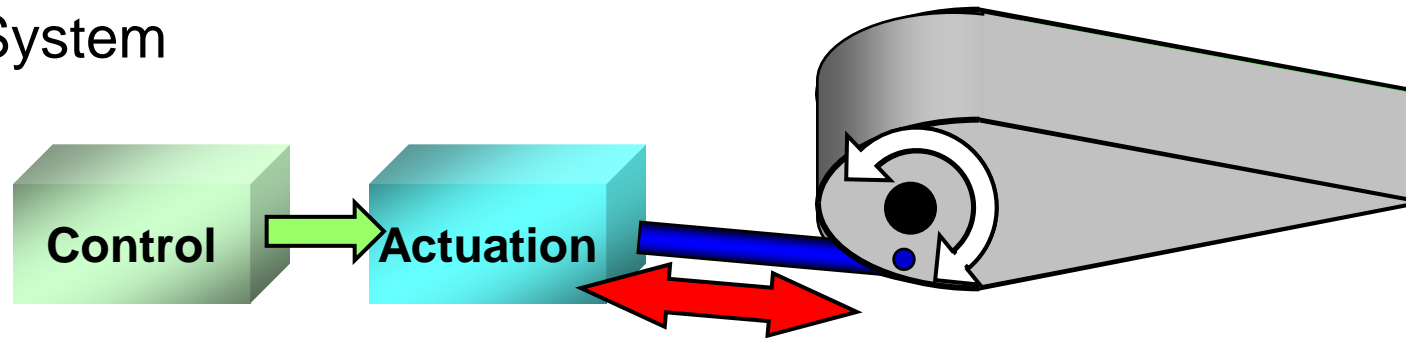


- Simulation goals

1. Determine requirements for actuation system
2. Test performance with electrical or hydraulic actuation
3. Optimize the actuation system
4. Assess effects of system implementation



Determining Actuation Requirements

Model:

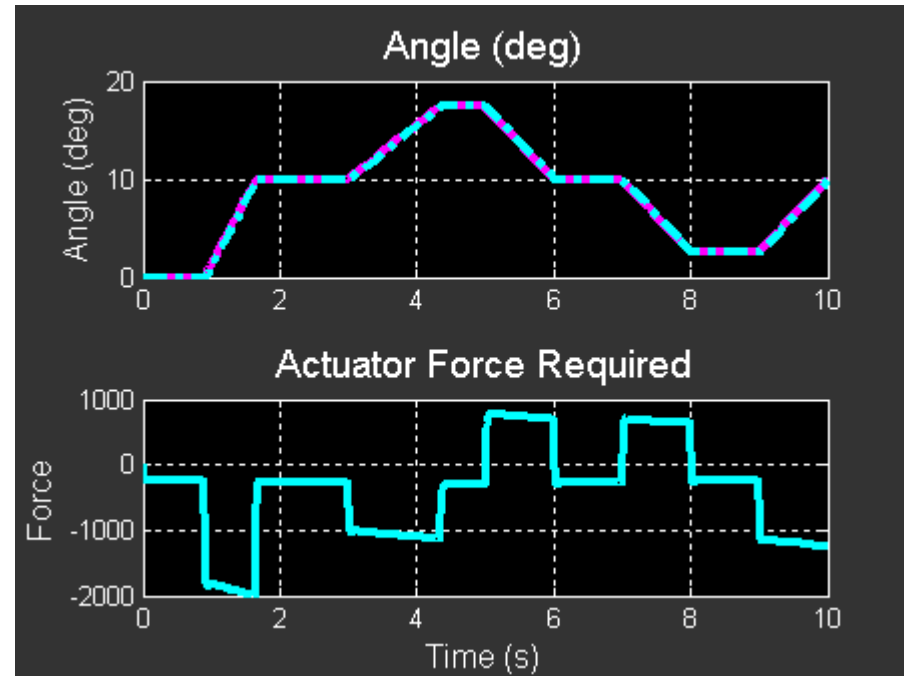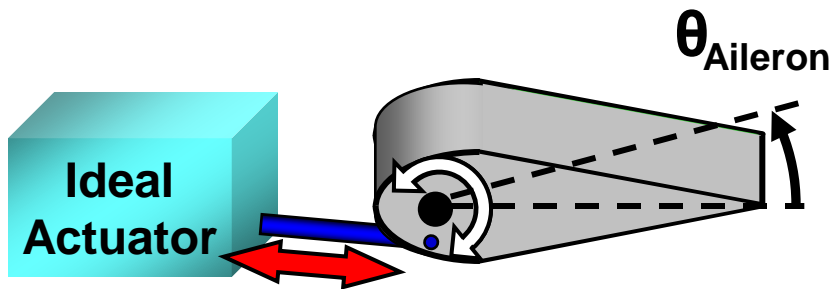

Problem: Determine the requirements for an aircraft aileron actuator


Solution: Use [SimMechanics](#) to model the aileron and [Simscape](#) to model an ideal actuator

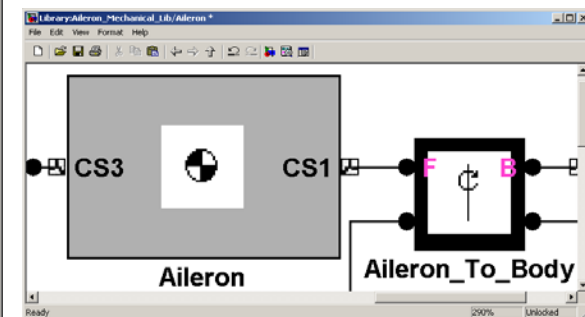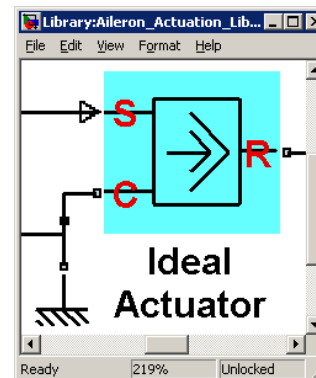

Test Electrical and Hydraulic Designs



Model:

Hydraulic

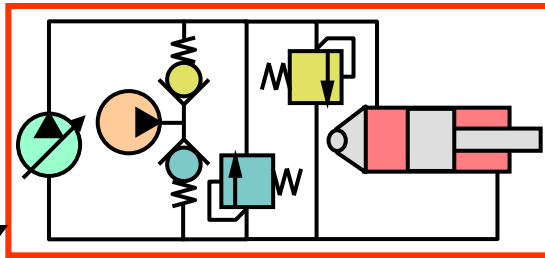


Actuator

Electro-
mechanical

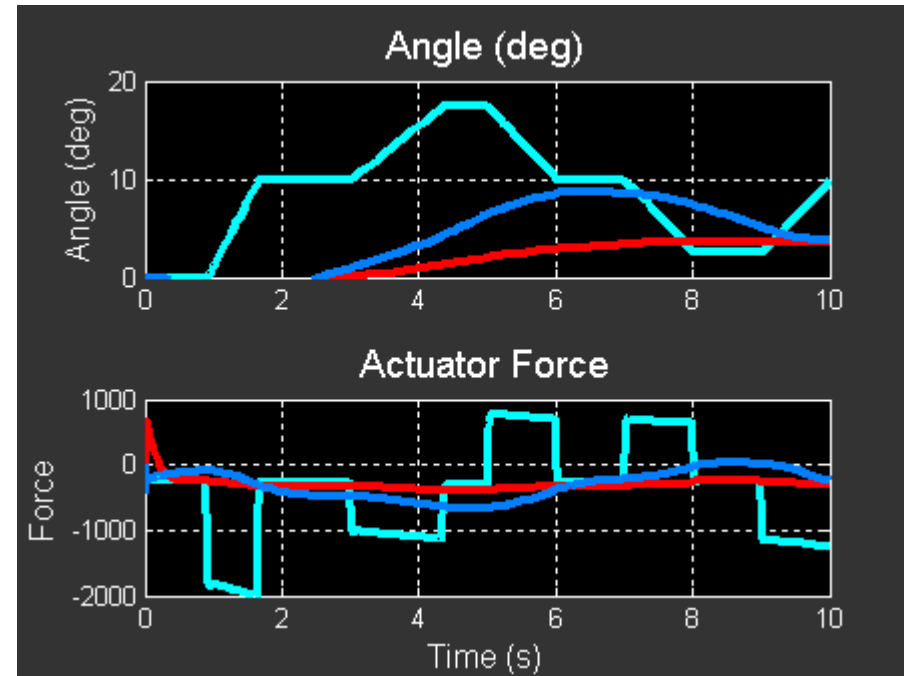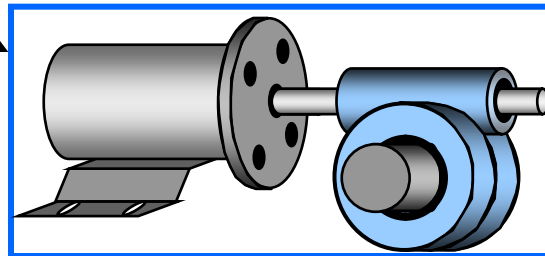


Problem: Test different actuator designs in the system

Solution: Use [SimHydraulics](#) and [SimElectronics](#) to model the actuators, and **configurable subsystems** to exchange them

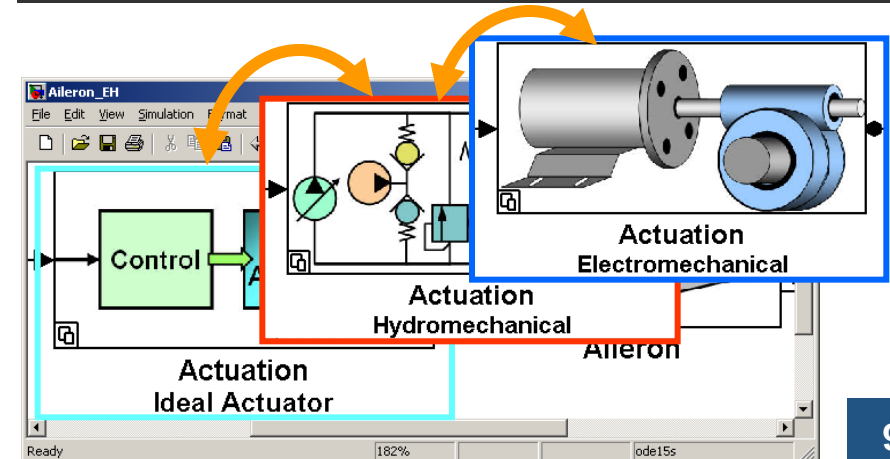


Actuator System-Level Designs

- Hydrostatic transmission

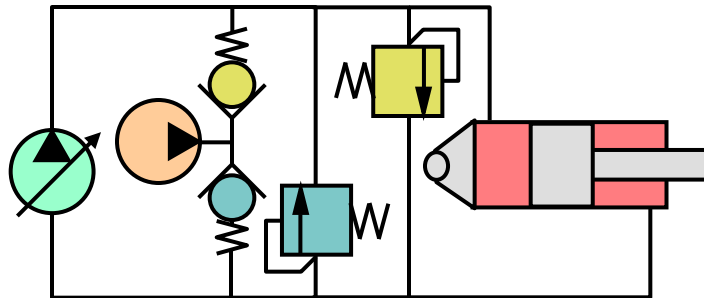

- Variable-displacement pump
- Double-acting hydraulic cylinder
- Replenishing valves
- Pressure-relief valves
- Charge pump
- Speed controller



- Electromechanical system

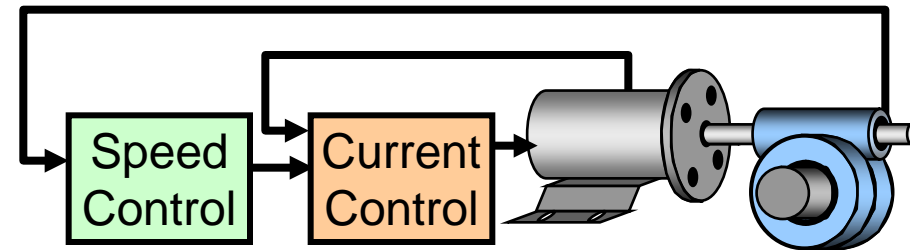

- DC Motor
- Worm gear
- Current sensor and current controller
- Hall effect sensor and speed controller
- PWM and H-bridge driver

Optimize System Performance

Model:

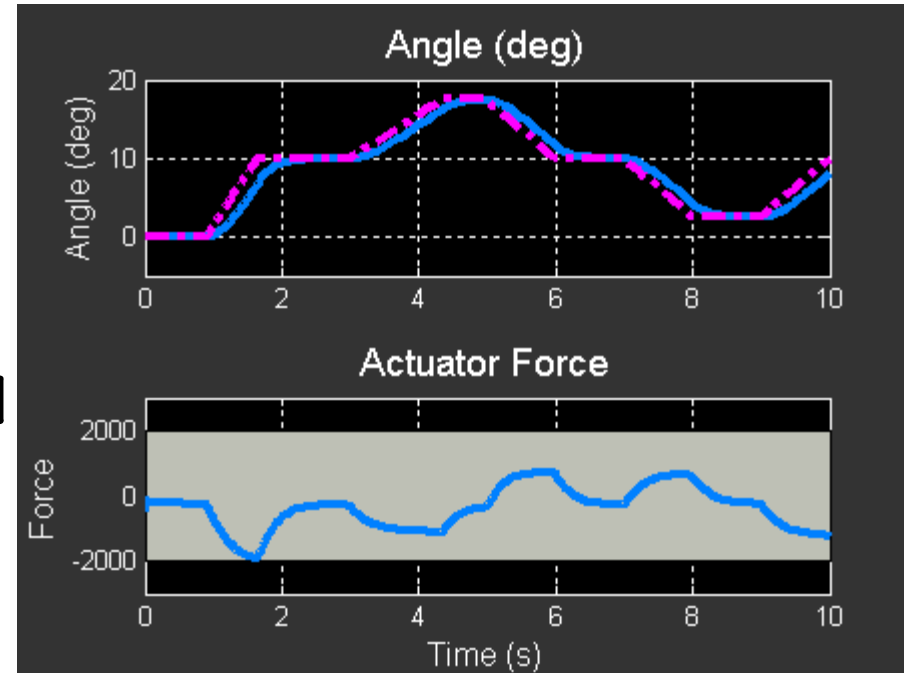
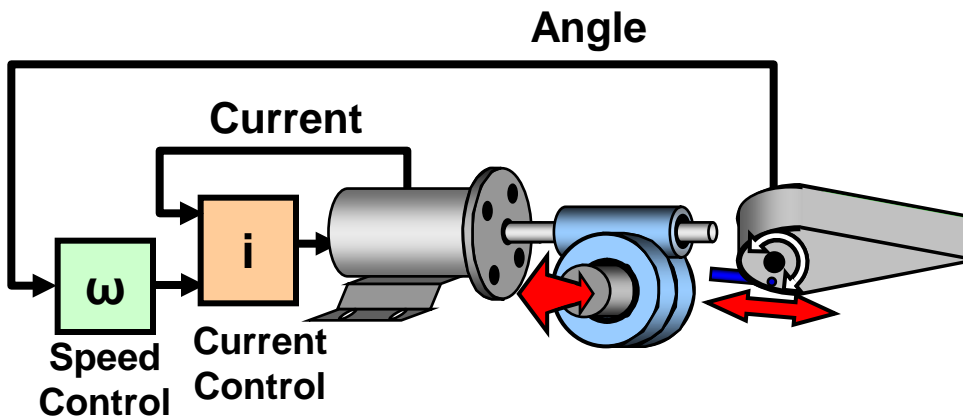


Problem: Optimize the speed controller to meet system requirements

Solution: Use [Simulink Design Optimization](#) to tune the controller parameters

ω Speed Control	K_p	K_i
	23.4	3.67

Assess Implementation Effects

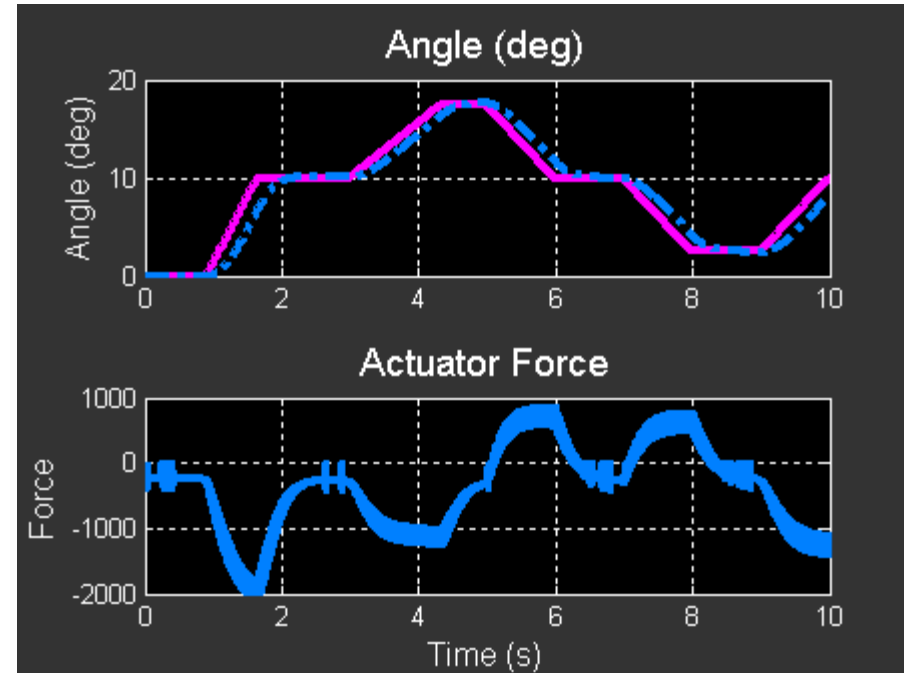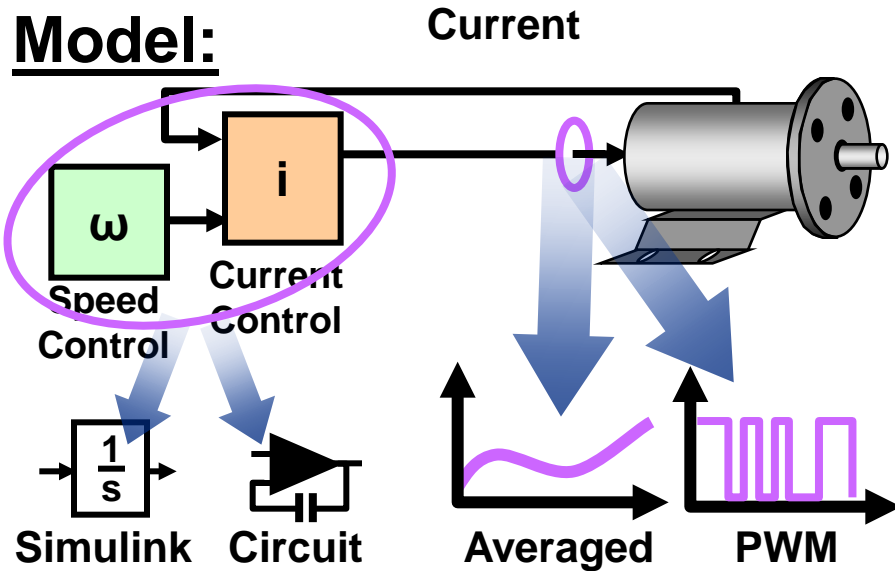

Problem: Assess the effects of design implementation on system performance

Solution: Use [SimElectronics](#) to add a PWM signal and analog circuit implementation






ω i

Parameters

Simulation mode: Averaged
PWM
Averaged





Conclusion

1. Testing different actuator designs in one environment saves time and encourages innovation
2. Optimizing systems with respect to design requirements leads to optimal design choices
3. Simulating at different levels of fidelity is required to see effects of design implementation

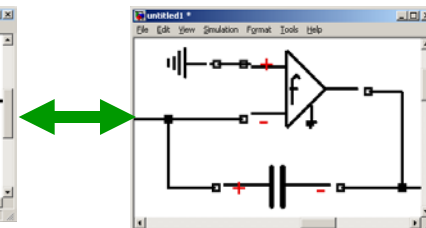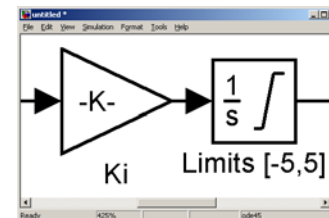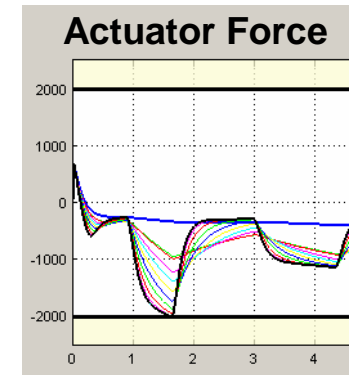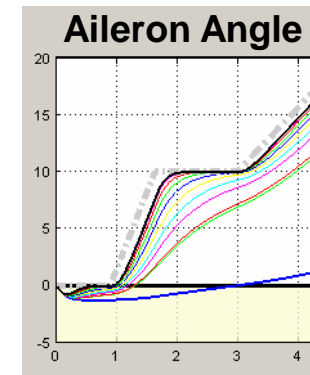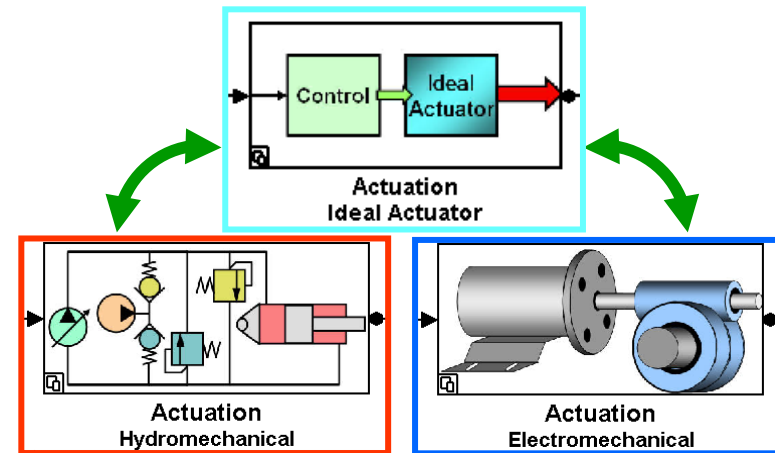

MathWorks Products Used

- Simscape
 - Multidomain physical systems
- SimMechanics
 - 3-D mechanical systems
- SimHydraulics
 - Hydraulic (fluid power) systems
- SimElectronics (new)
 - Electronic and electromechanical systems
- Simulink Design Optimization

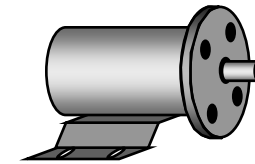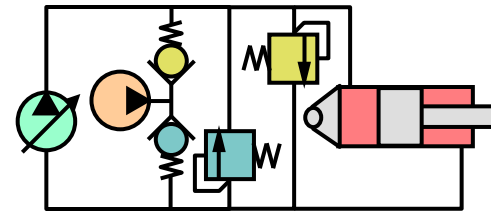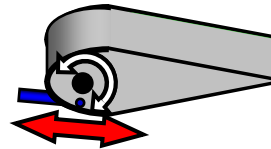

Actuators
& Sensors



Drivers



Semi-
conductors

